


RADIO REMOTE CONTROLS (BIOMETRIC) SYSCA 8B



SALIENT FEATURES

- Biometric fingerprint Authenticated Radio Remote Control System, Prevents unauthorized user access, hence **enhanced security**.
- Remote gets activated only when user fingerprint recognized.
- User log in / log out time along with date & month is stored on the device.
- Fingerprint Sensor is accurate and having long life operation cycles.
- The device can store up to 100 user fingerprints.
- User friendly PC based software for user to add, delete fingerprint.
- User data log stored in memory for month without power.
- Only START functionality can be range adjustable
- Operating channel can be changed on site
- Configurable Idle Time out in Transmitter

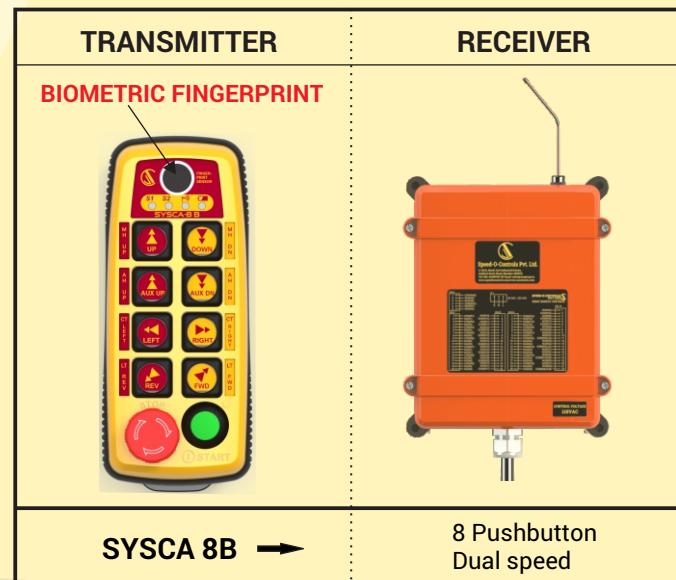

ADDITIONAL FEATURES

EMERGENCY STOP	2 NC contacts for EMS (EN-954-1 Safety Standard)
INDICATION	LED Indication for Battery LOW, Transmission and Error status
ADDRESS CODE	Unique Address Code to avoid interference
ANTENNA	Internal Antenna in transmitter & receiver
RELAY ASSIGNMENT	Configurable Relay assignment available

BATTERY & CHARGER DETAILS

BATTERY TYPE	Ni-MH,3.6V ,1000mAH
BATTERY WEIGHT	105 gm
BATTERY CHARGER INPUT SUPPLY	110 / 220 VAC
BATTERY CHARGER DIMENSION (MM)	105 X 75 x 45
BATTERY CHARGING TIME	4hrs

TRANSMITTER

MODEL	SYSCA 8B
Operating Frequency	433-434 MHz
Channel Spacing	25 KHz
Steps	2
Modulation / Coding Key	FM
Operating Commands	Double Speed Push Buttons
Power Consumption/Standy	36mA/4mA
Operating Range	100 meters
Battery Capacity & Type	3.6v, 1000mAH NiMH Battery
Operating Temperature	-20°C to +70°C
Protection Rating	IP 65 (IS/IEC 60529:2001 (NABL lab tested)
Dimensions (mm)	170(H) x 70(W) x 55(B)
Weight	325 gms (without battery)

RECEIVER

Operating Frequency	433-434 MHZ
Channel Spacing	25 KHz
Modulation/ Coding Key	FM
RF Power Output	10mW
Power Requirements	48~230 V AC
Relays	Resistive Load: 5 A at 250 VAC
No Relays	Up to 21 Relays
Operating Temperature	-20°C to +70°C
Fastening	By means of Nuts & Bolts
Protection Rating	IP 65 (IS/IEC 60529:2001 (NABL lab tested)
Dimensions (mm)	282(H) x 220(B) x 110(W)
Weight	1.2 kg